



FANVIL i51W/i52W/i53W/i56A INDOOR SIP STATION SECURITY INDUSTRY UNIFIED COMMUNICATION DEVICES - BUILDING INTERCOM

Fanvil i51W/i52W/i53W/i56A is a SIP indoor station with a clear color screen and easy-to-access buttons, which can be applied in different indoor scenarios. Working with door phone and intercom at the entrance, Fanvil indoor station can be easily achieved remote access control for residences. It can also be connected to alarms and other intelligent security devices via rich interfaces.



i51W



i52W



i53W



i56A

HIGHLIGHTS- i53W indoor SIP station



Elegant Design with 7-inch Color Touch Screen

Fanvil i53W delivers a user-friendly experience with an elegant design and a clear 7-inch color touch screen.
· i51W and i52W are 4.3-inch and 7-inch color displays



Easier Operation

With a clear touch screen, Fanvil i53W offers a direct access to all key functions at your fingertips, providing a smoother operation experience for the users.
· i51W and i52W are non touch screens



HD Audio and Video Communication

Users can communicate with visitors with superb audio and clear video images via Fanvil i53W.




5 Easy-to-access Physical Buttons

Users can easily achieve different functions with one press on Fanvil i53W.



Built-in 2.4G Wi-Fi

Fanvil i53W supports built-in 2.4G Wi-Fi, and it allows users to choose wireless connection mode for different requirements.



Rich Interfaces

Fanvil i53W is flexible and powerful with rich interfaces to connect more security devices.



HIGHLIGHTS- i56A indoor SIP station



Elegant Design with 10.1-inch Color Touch Screen

Fanvil i56A delivers a user-friendly experience with an elegant design and a clear 10.1-inch color touch screen.



Optimized Android 9.0 Operation System

Android 9.0 OS in Fanvil i56A supports a greater compatibility and more powerful functions.



Easier Operation

With a clear touch screen, Fanvil i56A offers a direct access to all key functions at your fingertips, providing a smoother operation experience for the users.




HD Audio and Video Communication

Users can communicate with visitors with superb audio and clear video images via Fanvil i56A.



Built-in 2.4G/5G Wi-Fi

Fanvil i56A supports built-in 2.4G/5G Wi-Fi, and it allows users to choose wireless connection mode for different requirements.



Rich Interfaces



Fanvil i56A is flexible and powerful with rich interfaces to connect more security devices.



APPLICATION SCENARIOS

Remote Access Control

Residents can have the audio and video communication with the visitors and identify the visitors and achieve the access control through the Fanvil i series indoor station.

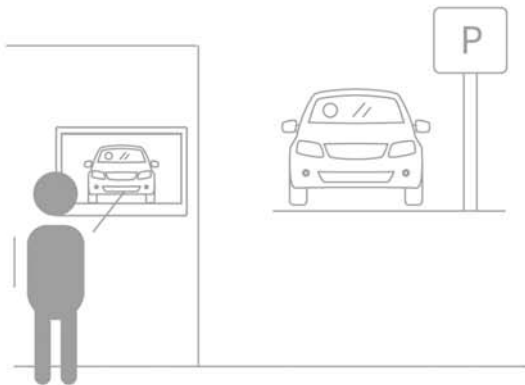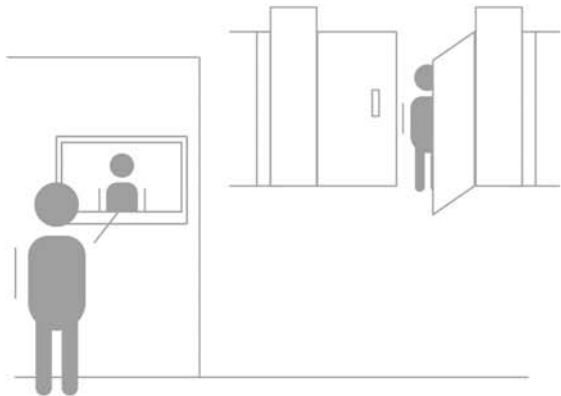


24Hour Real-time Monitor

People can view the camera images in real time on Fanvil indoor stations in villa, warehouse, parking lot, etc., which can make sure to discover any suspicious situation and take in-time reaction.

Support External Alarm Connection

With 8 alarm input interfaces, Fanvil i series indoor station supports external fire/gas alarm connection. If any emergency, the indoor station will trigger the alarms in time.

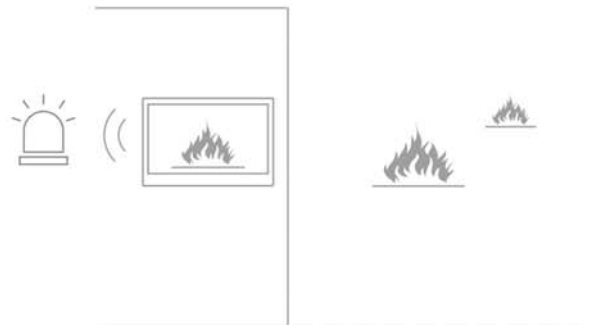

INDOOR SIP STATIONS



i51W



i52W




i53W



i56A

	i51W	i52W	i53W	i56A
System	Linux	Linux	Linux	Android 9.0
Display	480x272 4.3-inch Color Screen	480x272 7-inch Color Screen	1280 x 800 7-inch Color Touch Screen	1280 x 800 10.1-inch Color Touch Screen
HD Audio	✓	✓	✓	✓
Wideband Codec	G.722, opus	G.722, Opus	G.722, Opus	G.722, Opus
Speaker Power	1.5W	1.5W	1.5W	1W(double speakers)
Video Resolution	1080P	1080P	1080P	1080P
Video Codec	H.264	H.264	H.264	H.264
ONVIF	✓	✓	✓	✓
SIP Line	4	4	6	6
Bluetooth	×	×	×	Built-in bluetooth
Wi-Fi	Built-in 2.4G Wi-Fi	Built-in 2.4G Wi-Fi	Built-in 2.4G Wi-Fi	Built-in 2.4G/5G Wi-Fi
Button	5	5	5	3
Alarm input interface	8	8	8	8
Short output interface	×	×	×	2
RS-485 interface	1	1	1	1
TF interface	×	×	×	1
USB port	×	×	×	1
Internet	10/100 Mbps	10/100 Mbps	10/100 Mbps	10/100 Mbps
PoE enabled	✓	✓	✓	✓
Installation Mode	Desktop/Wall Mounted	Desktop/Wall Mounted	Desktop/Wall Mounted	Desktop/Wall Mounted

COMPATIBILITY

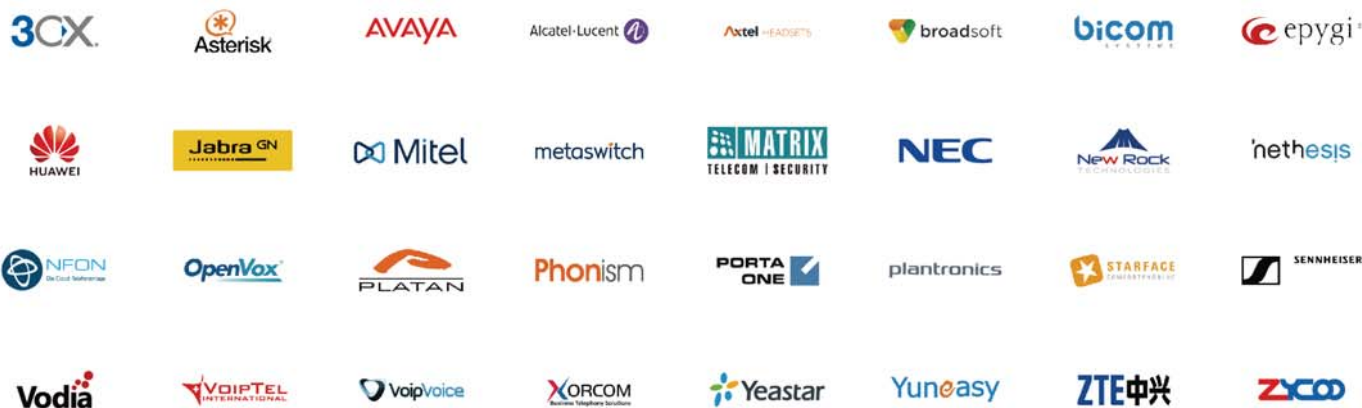

Fanvil

Fanvil Technology Co., Ltd

Add: 10/F Block A, Dualshine Global Science Innovation Center,
Honglang North 2nd Road, Bao'an District, Shenzhen, China
Tel: +86-755-2640-2199 Fax: +86-755-2640-2618
Email: sales@fanvil.com support@fanvil.com
Web: www.fanvil.com